


PRODUCT SERIES SPECIFICATIONS

Series: DTLD
Category: General Purpose
Pressure: Vacuum to 20 psi, 1.38 bar
Temperature: 32°F-120°F (0°C-48°C)
Sterilization Method: EtO
Material Compliance
Reach: N/A
RoHS: Compliant

For more information see cpcworldwide.com or contact us at cpcworldwide.com/ContactUs






Interactive 3D graphic, click to activate and rotate.

The 1/4" flow PLC Series is proven worldwide in thousands of applications and offers the widest selection of sizes and configurations. PLC couplings are injection molded from acetal and ABS thermoplastic and are resistant to most mild chemical solutions. One-hand connection/disconnection, plus integral terminations make the PLC Series the choice for ease of use and manufacture.


Features - Benefits

- CPC thumb latch - One-hand connection and disconnection
- Integral terminations - Fewer leak points, shorter assemblies, faster installations
- Clicks when connected - Assurance of a reliable connection
- Compatible - Mates with DTLD, LC and PLC12 Series couplings

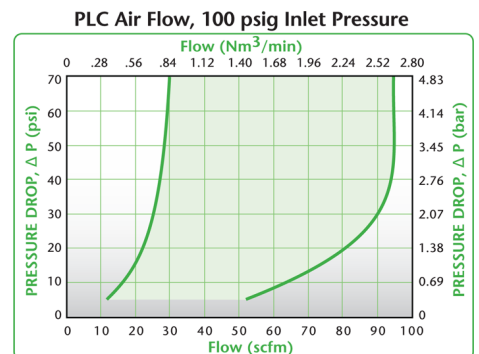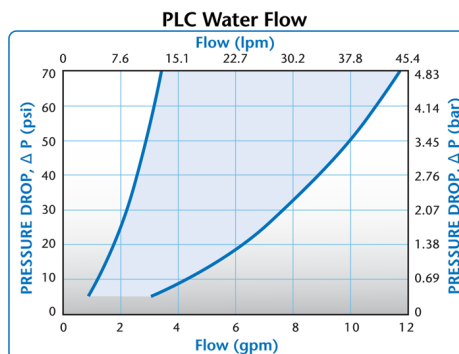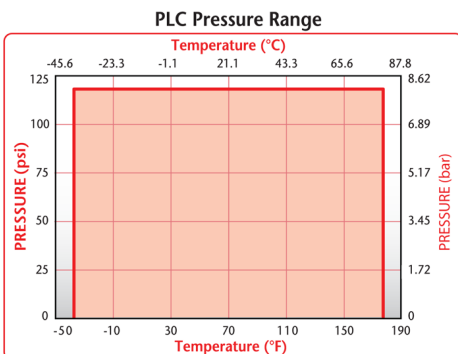

These graphs are intended to give you a general idea of the performance capabilities of each product line. Contact CPC for flow of a particular coupling combination.

Technical details:

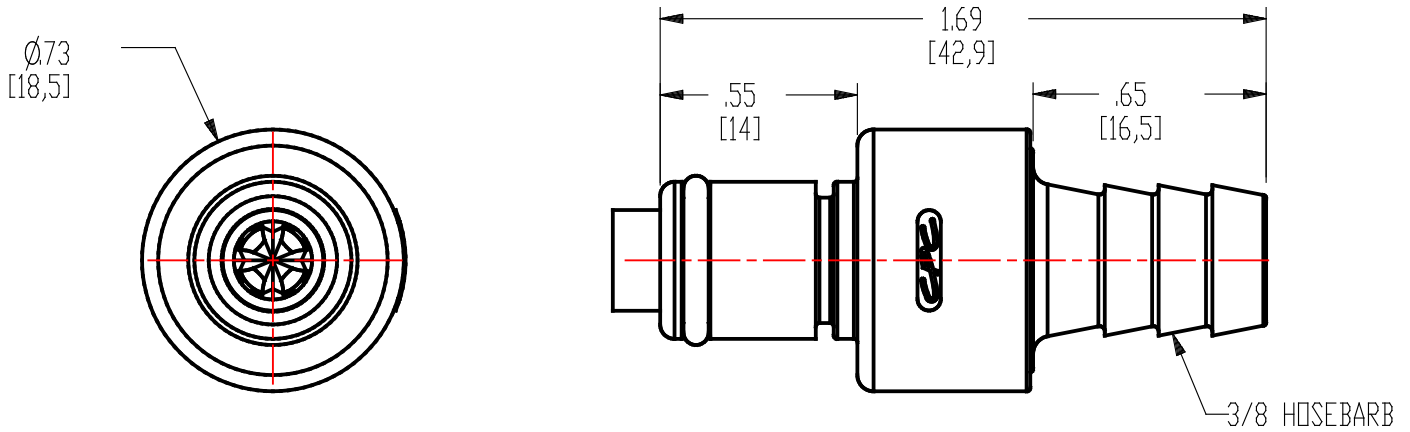

Description: 3/8" Hose Barb, Valved, In-line Coupling Insert

Materials:

Main Components: Black ABS

Valve: Almond polypropylene

Valve Spring: Stainless Steel

Seals: Buna-N

Standard Packaging Quantity: 25