
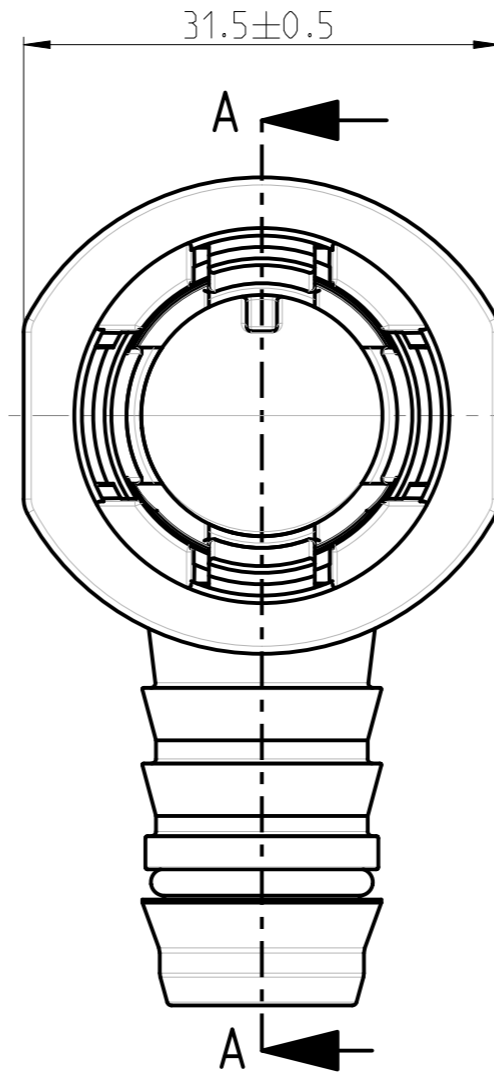



Angebotszeichnung
QUOTATION DRAWING

SCHNITT / SECTION A-A

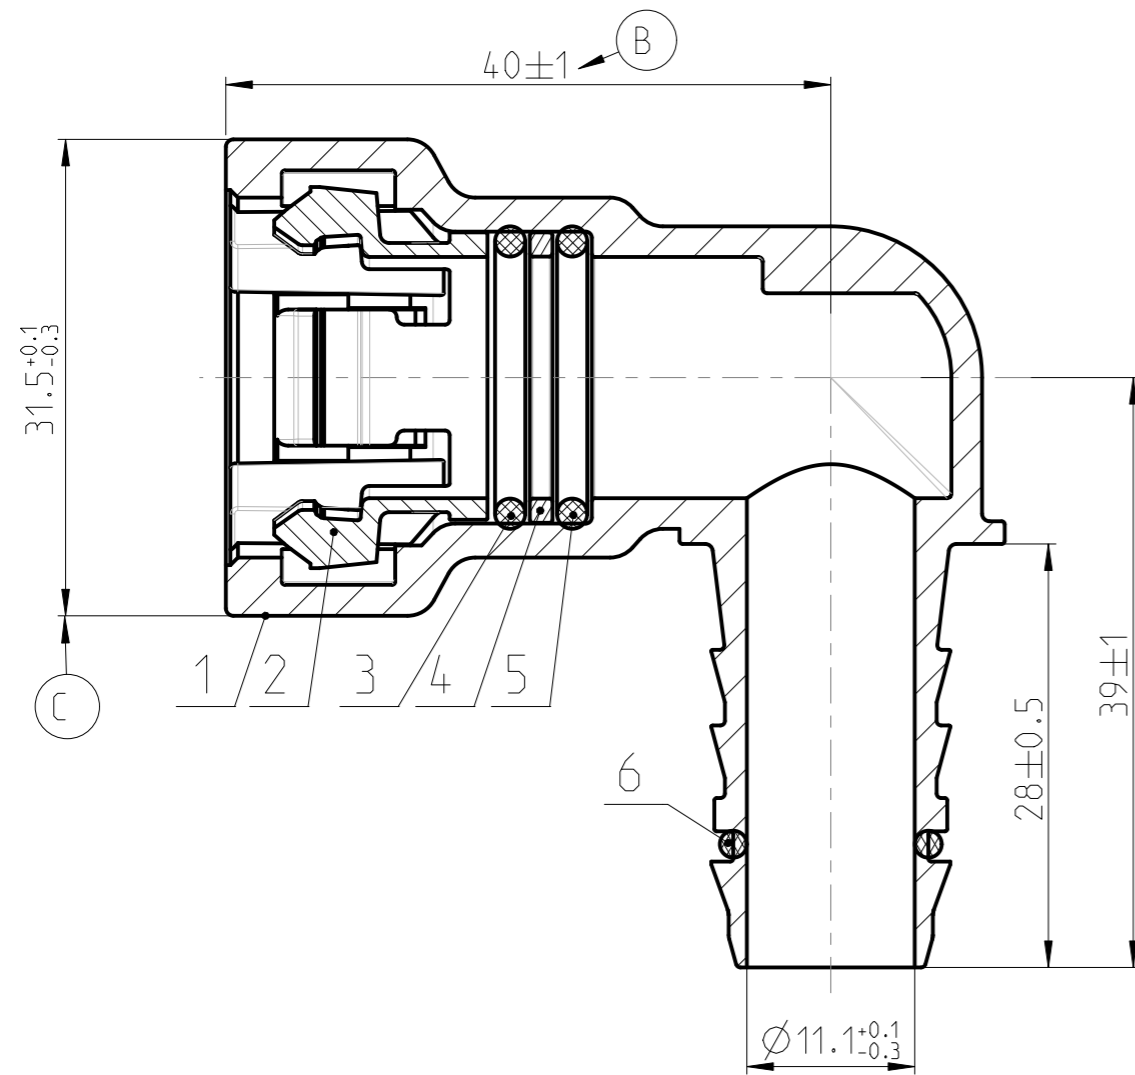

D

B

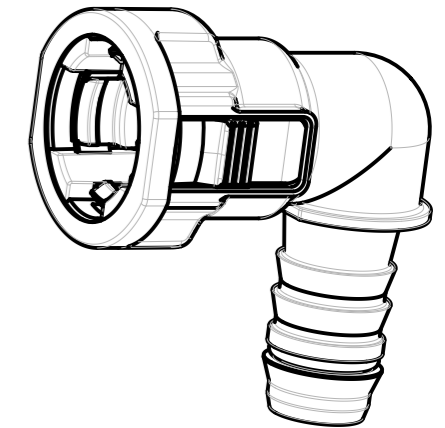


MASSSTAB / SCALE 1:1

| Teil-Nr ITEM-NO | Stueck QTY | Benennung PART - NAME | Werkstoff MATERIAL | Oberflaeche SURFACE |
|--------------------|---------------|---|-----------------------|------------------------|
| 1 | 1 | Housing NORMAQUICK S NW 5/8''-1/2'' 90° | PA12-GF50 | black |
| 2 | 1 | Retainer NW 5/8'' | PA12-GF30 | black |
| 3 | 1 | O-RING 16.0 X 2.0 | FVMQ | yellow |
| 4 | 1 | Spacer NW 5/8'' | PA6-GF30 | black |
| 5 | 1 | O-RING 16.0 X 2.0 | FPM | black |
| 6 | 1 | O-RING 11.11 X 1.78 | FPM | black |

| NORMAQUICK - ASSEMBLY MARKING | |
|-------------------------------|-------------|
| Customer part-No.: | - |
| Trademark: | - |
| Manufacturer code: | NORMA-RSS |
| NORMA date code: | XX YY |
| Material code molding part: | >PA12-GF50< |

Anschlussstutzen / Connecting spigot
gem./acc. to SAE J 2044
MASSSTAB / SCALE 1:1

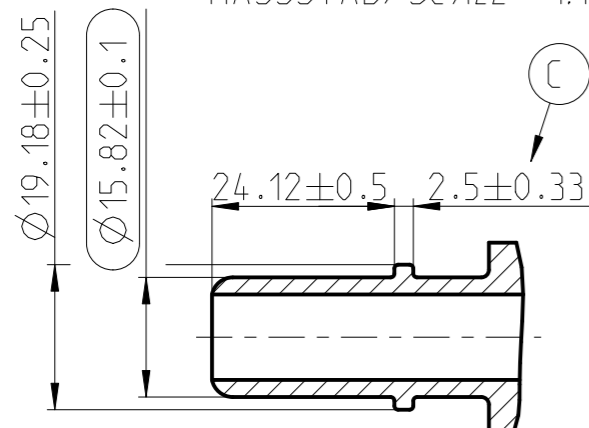

| | | | | | | | |
|---|---|---|--|--------|------------|-------|-----------|
| - | D | 1 | For Pos.5 quantity was 2 | - | 2013-01-03 | Guru | Jacksteit |
| - | C | - | Ø19.3±0.1 war Ø19.4±0.1, 31.5+0.1/-0.3 war 31.5±0.1, 2.5±0.33 war 2.5±0.25, Kennz. aktual. | 602254 | 19.03.04 | TS/SK | Bahlke |
| - | B | - | 40 war 41; O-Ring 11.1x1.78 war 12.42x1.78 (...229) | 602042 | 03.12.03 | SB/SK | Bahlke |
| - | A | - | Gehaese und Haltefeder geaendert; Bild Anschlussstutzen zgf | 602005 | 31.10.03 | JH/SK | Bahlke |

| INDEX Teil PART | Anz. Zeichg DWG | Anz. QTY. | Andering DESCRIPTION | Aend.Nr. CHANGE-NO. | Datum DATE | Bearb. DRAWN | Gepr. CHECKED |
|-----------------------|-----------------------|--------------|-------------------------|------------------------|---------------|-----------------|------------------|
|-----------------------|-----------------------|--------------|-------------------------|------------------------|---------------|-----------------|------------------|

| | | | | | | |
|--|--|---|--|-------------------|---------------------|-------------------------------------|
| Allgemeintoleranz: GENERAL TOLERANCE: | Form- und Lagetoleranz: FORM AND POS. TOL.: | Abmass fuer Winkel: DEVIATION FOR ANGLE: | Gewicht / WEIGHT: errechnet CALCULATED | gewogen actual | Volumen: VOLUME: | Pruefkenzeichnung: TEST MARKING: |
| DIN 16901-130 | DIN ISO 2768 | ±2° | - | - | - cm ³ | |

| | | |
|---|--|---|
| Projektions-Methode 1 1st ANGLE PROJECTION DIN ISO 128-30 | Material: see parts list Material-No.: - Oberflaeche: see parts list SURF. QUAL.: - | PART NAME: NORMAQUICK S NW 5/8''-1/2'' 90° for SAE-Spigot Ø15.82 mm |
|---|--|---|

| | | | | |
|---------------------------------------|----------------------------|---------------------------|-----------|---|
| NORMA-Patentnummer: PATENT NUMBER: | Massstab: SCALE: 2:1 | Datum/DATE | Name/NAME | Benennung: NORMAQUICK S NW 5/8''-1/2'' 90° fuer SAE-Stutzen Ø15.82 mm |
| - | - | Bearb./DRAWN 20.02.03 | SB/SK | - |
| - | - | Gepr./CHECKED 20.02.03 | Bock | - |
| - | - | Norm | - | - |

| | | | | | |
|--------------------------------|--|-------------------|-------|--------|--------|
| Bandlaenge: LENGTH OF BAND: | Schutzvermerk nach ISO 16016 beachten CONSIDER AFTER PROTECTION NOTICE ISO 16016 | Kunde / CUSTOMER: | DIN A | SHEET: | SHEETS |
| - | - | - | 3 | 1 | 1 |

| | | | | | |
|------|-----------------------------------|---|-------------------------------|-------------------|------|
| ZNE: | Ursprung/Anfrage: ENQUIRY-No.: | NORMA Germany GmbH Postfach 1149 • 63461 Maintal © COPYRIGHT BY NORMA Group | Zeichnungs-Nr. / DRAWING-NO.: | INDEX PART DWG | TYPE |
| - | 9990008285 | - | 0715 8504 016 | 00 | 0D |
| - | - | - | - | Q | - |

| | | | |
|-------------------------|-----------------------------|-------------------------|------------------|
| CAD-SYSTEM Pro/Engineer | DRAWING-NAME: 07158504016_Q | SUB.F.: ENG 03026 | SUB.FROM: Bock |
| - | - | MODEL-NAME: 07158504016 | MODEL-TYP: ASSEM |

